

# ACCESSORIES


## ANP plug



### ANP-K-M-L




Panel cutting size (mm)

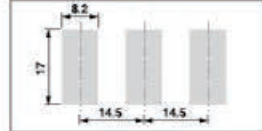

① Thermocouple type (Color) 热电偶种类	<b>K</b> : Chromel-Alumel (Yellow) *ANP-**-H. is ivory <b>E</b> : Chromel-Constantan (Purple) *ANP-**-H. is ivory <b>T</b> : Copper-Constantan (Blue)
② Body shape 形状	<b>M</b> : See picture <b>F</b> : See picture (not for Type V) <b>P</b> : See picture (only Body Material L)
③ Body material 材质	<b>L</b> : Glass filled nylon (150°C) <b>H</b> : Liquid crystal polymer (300°C) *Only Type K or Type E

## ASP plug

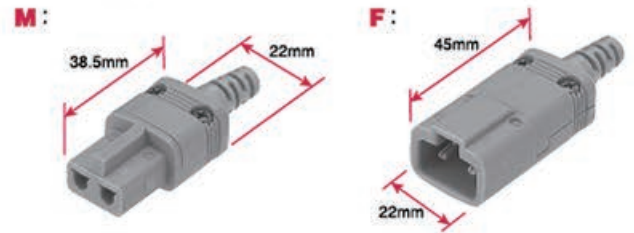

### ASP-K-M-φ2.5



① Thermocouple type (Color) 热电偶种类	<b>K</b> : Chromel-Alumel (Yellow) <b>E</b> : Chromel-Constantan (Purple)
② Body shape 形状	<b>M</b> : See picture <b>F</b> : See picture
③ Bushing size 材质	<b>φ2.5</b> : For TS cable <b>φ3.5</b> : For SG cable <b>φ4.2</b> : For TC cable, TCG cable and TPC cable


## ANT

### ANT-K-6P-L



① Thermocouple type 热电偶种类	<b>K</b> : Chromel-Alumel <b>E</b> : Chromel-Constantan
② Number of terminals 点数	<b>3P</b> : 3 Terminals <b>6P</b> : 6 Terminals
③ Material (Max. temp.) 材质	<b>L</b> : Phenol (150°C) <b>H</b> : Glass cloth board (350°C)

## ANJ series

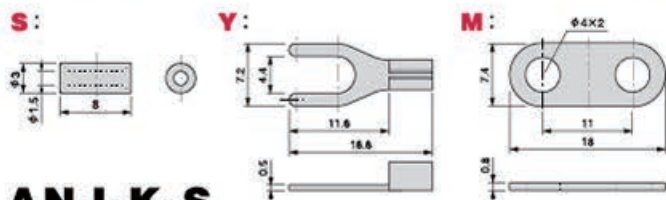

### ANJ-K-S



① Thermocouple type 热电偶种类	<b>K</b> : Chromel-Alumel <b>E</b> : Chromel-Constantan
② Form 形状	<b>S</b> : See picture <b>Y</b> : See picture (M3 or M4 Selectable) <b>M</b> : See picture (M3 or M4 Selectable)

10 pcs/set

## Compensating cable

Type	Model	Sheath material	Diameter φ (mm)	Heat resistant
K	TS-K	Silicone rubber	2.3	240°C
	TF-K	Fluororesin	2	230°C
	TC-K	Silicone rubber	4	240°C
	TCG-K	Silicone rubber with Stainless steel	4.5	240°C
	GW-K	Glass fiber	1.2×1.7	300°C
	SG-K	Glass fiber with Stainless steel	3	400°C
E	TS-E	Silicone rubber	2.3	240°C
	TF-E	Fluororesin	2	230°C
	TC-E	Silicone rubber	4	240°C
	TCG-E	Silicone rubber with Stainless steel	4.5	240°C
	GW-E	Glass fiber	1.2×1.7	300°C
	SG-E	Glass fiber with Stainless steel	3	400°C

※ Specify the cable type and length.

※ The cable length can be specified in 1m increments.