

Model XX series

Extension Cables


Model XX series cables are used to extend the cable connection between the main thermometer unit and the probe. Specific components may be combined to customize products for the needs of a customer's specific application.

XX系列

XX系列产品是连接温度传感器的延长导线。

通过组合各个规格的组件，可以按照客户的用途进行个性选配。

How to order of XX series 选型

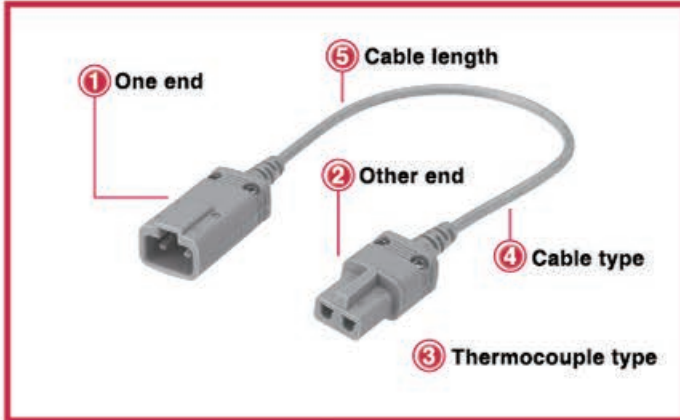

XX-0101K-TC00

① ② ③ ④ ⑤

| | |
|--|---|
| ① One end (Probe side) 一端 | 01 : ASP-F 02 : ANP-F 03 : W (Without plug) 05 : WA (Sheathed banana plugs) 06 : WT3 (Spade terminal for $\phi 3\text{mm}$) 07 : WT4 (Spade terminal for $\phi 4\text{mm}$) 08 : WT5 (Spade terminal for $\phi 5\text{mm}$) 09 : WC3 (Ring terminal for $\phi 3\text{mm}$) 10 : WC4 (Ring terminal for $\phi 4\text{mm}$) 11 : WC5 (Ring terminal for $\phi 5\text{mm}$) |
| ② Other end (Thermometer side) 另一端 | 01 : ASP-M 02 : ANP-M 03 : W (Without Plug) 05 : WA (Sheathed banana plugs) 06 : WT3 (Spade terminal for $\phi 3\text{mm}$) 07 : WT4 (Spade terminal for $\phi 4\text{mm}$) 08 : WT5 (Spade terminal for $\phi 5\text{mm}$) 09 : WC3 (Ring terminal for $\phi 3\text{mm}$) 10 : WC4 (Ring terminal for $\phi 4\text{mm}$) 11 : WC5 (Ring terminal for $\phi 5\text{mm}$) |
| ③ Thermocouple type 热电偶种类 | K : Chromel-Alumel E : Chromel-Constantan |
| ④ Cable type (See page 9) 导线种类 | TC TS TF SG |
| ⑤ Cable length 导线长度 | 00 : 0.3m 01 : 1m 02 : 2m 10 : 10m |

① One end

01:



ASP-F

02:



ANP-F

03:



W

05:



WA
Sheathed banana plugs

06 : for $\phi 3$
07 : for $\phi 4$
08 : for $\phi 5$



WT
Spade terminal for $\phi 3\sim 5\text{mm}$

09 : for $\phi 3$
10 : for $\phi 4$
11 : for $\phi 5$



WC
Ring terminal for $\phi 3\sim 5\text{mm}$

② Other end

01:



ASP-M

02:



ANP-M

03:



W

05:



WA
Sheathed banana plugs

06 : for $\phi 3$
07 : for $\phi 4$
08 : for $\phi 5$



WT
Spade terminal for $\phi 3\sim 5\text{mm}$

09 : for $\phi 3$
10 : for $\phi 4$
11 : for $\phi 5$



WC
Ring terminal for $\phi 3\sim 5\text{mm}$